

Compressed air container stirrers model series PMC 120/600

Suitable for stirring tasks in Intermediate Bulk Container IBC 600 L and 1000 L at medium speed.

General specifications

- All-stainless steel housing
- Operating pressure 3-6 bar
- Air consumption 1380 L/min. at 6 bar
- Clockwise rotation
- ATEX certification



Basic models include

- Continuously adjustable speed control valve
- Plug-in connector for DN 7.8
- Silencer
- Traverse support to fit on standard IBC
- Foldable swing-out stirrer BuddeMix SW 2 Ø 400 mm
- Residue paddle Ø 138 mm

Types of mixing

- Homogenising
- Suspending
- Heat exchange


Speed range

- Medium



Type	PMC 120/600
Viscosity	100000 mPas
Volume	1500 L
Power output	1,2 kW
No-load speed	600 rpm
Minimum operation speed	150 rpm
Torque	38 Nm
ATEX	II 1/2G Ex h IIB T4 Ga/Gb
Code-No.	40 26446 00811 6

All technical pertaining to 6 bar. Viscosity data to be considered as guidelines.

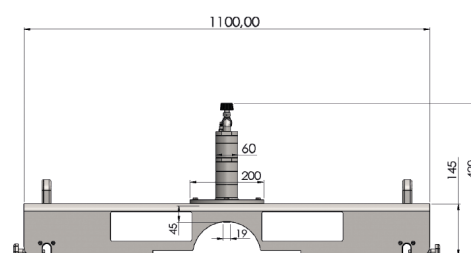

All dimensions in mm.