

Magnetic stirrer couplings BUK G-V model series

The G-V design with M30 thread (vacuum-proof, pressure-resistant up to 200 bar)


The G-V design offers all the technical specifications of the G versions, but is additionally equipped with a side gas flush connection for gas flushing and inertisation.

A suitable gas flush valve is included in the scope of delivery and is already pre-assembled.

Types of mixing

-  Homogenising
-  Dispersing
-  Suspending
-  Gassing


Pressure

-  Vacuum / pressure up to 200 bar



Type	BUK K90G-V
Connection	Thread M30x2
Temperature max.	300 °C
Pressure max.	200 bar
Sealings*	O-ring FFKM or cutting ring HC22
Material	1.4435 AISI 316L
Speed max.	2500 rpm
Torque	90 Ncm
Volume max.	10000 ml
Bearings	Ball bearings stainless steel
Reed contact and speed sensor	Yes
Gas flush connection	Yes
Drive motor	-
Code-No.	40 26446 00209 1

*Seal not included with delivery. Drive shaft supplied with 6 mm external square stub.

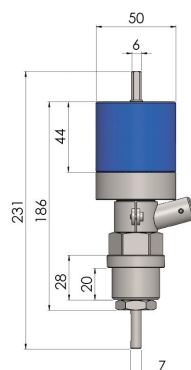

All dimensions in mm.